



SAHM 700XE Parallel Winder

Market segments:

- Monofilaments from PP, PES, PE, PA


Applications:

- Fishing lines, tooth brushes, fabrics for protection against insects, artificial grass, filters, tennis and badminton rackets

Technology:

Drive:	Frequency-controlled
Standard frame:	4-tier up to Ø 250 mm 3-tier up to Ø 355 mm
Material diameter:	0,08 to 1,2 mm
Winding speed:	60 to 300 m/min
Maximum traverse length:	365 mm
Maximum package diameter:	355 mm
Tubes:	K 200, K 250, K 355 HKV, paper, plastic and aluminium tubes possible
Yarn tension:	50 to 1000 cN

Combination of all maximum values is not possible.

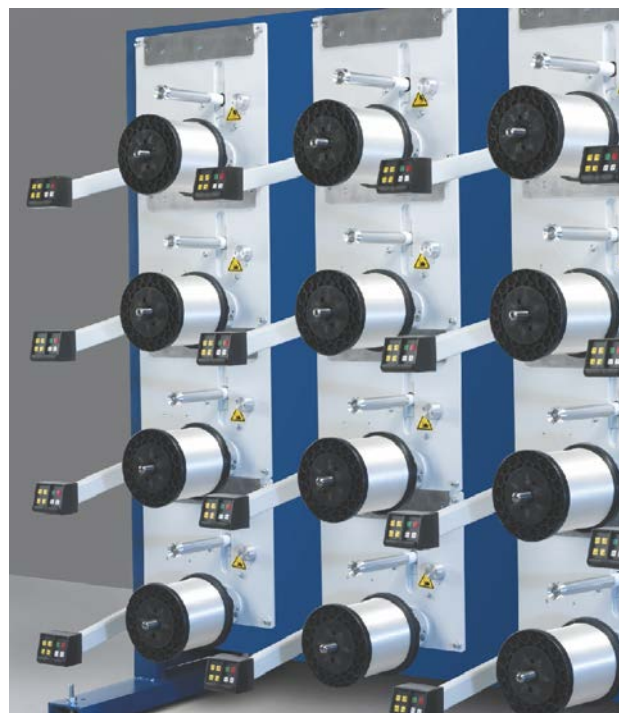

Features / Options:

- Individual drive per spindle and traverse
- Centrally adjustable process parameters
- Decreasing yarn tension
- Various package shapes possible: cylindrical, biconical, diabolo and cops
- Integrated software option for winder grouping
- Single- or double-sided frame construction



WINDERS + SYSTEMS
a member of Starlinger Group

Georg Sahn GmbH & Co. KG · Sudetenlandstrasse 33 · 37269 Eschwege · Germany

Tel.: +49 5651 804-0 · Fax: +49 5651 13620 · Internet: www.sahmwinder.de · E-mail: info@sahmwinder.de